


# DIMENSIONS • T-FRAME, C-FACE WITH FEET, 3-PH

**AN & AB MODEL NUMBERS (CTAC®)  
S EFFICIENCY CODES**

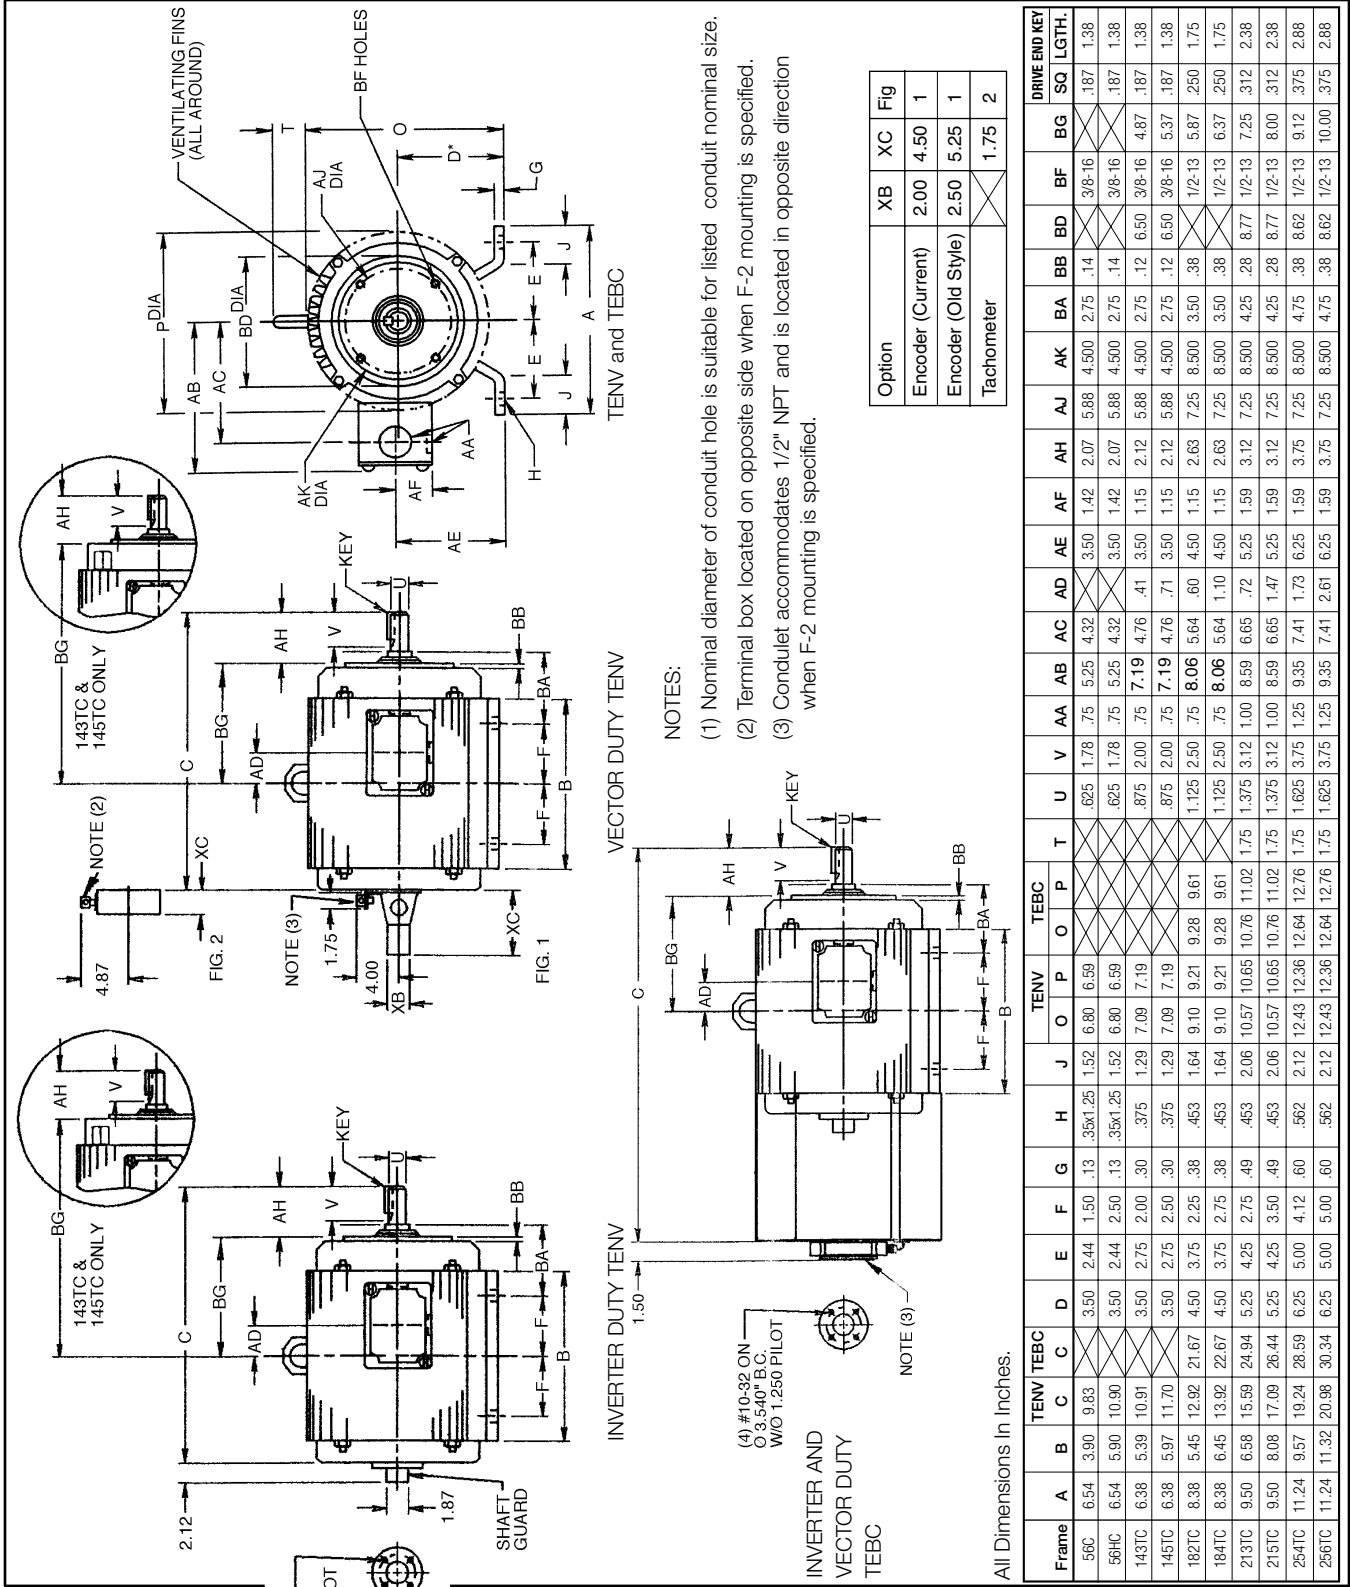

Data subject to change without notice.

(4) #10-32 ON  
O 3.540" B.C.  
W/O 1.250 PILOT

All Dimensions in Inches.

Frame	TENV		TEBC		TENV		TEBC		TENV		TEBC		TENV		TEBC		DRIVE END KEY												
	A	B	C	D	E	F	G	H	J	O	P	T	U	V	AA	AB	AC	AD	AE	AF	AH	AJ	AK	BA	BB	BD	BF	BG	SQ
56C	6.54	3.90	9.83	3.50	2.44	1.50	.13	.35x1.25	1.52	6.80	6.59	.625	1.78	.75	5.25	4.32	3.50	1.42	2.07	5.88	4.50	2.75	.14	3/8-16	3/8-16	3/8-16	3/8-16	.187	1.38
56HC	6.54	5.90	10.90	3.50	2.44	2.50	.13	.35x1.25	1.52	6.80	6.59	.625	1.78	.75	5.25	4.32	3.50	1.42	2.07	5.88	4.50	2.75	.14	3/8-16	3/8-16	3/8-16	3/8-16	.187	1.38
143TC	6.38	5.39	10.91	3.50	2.75	2.00	.30	.375	1.29	7.09	7.19	.875	2.00	.75	7.19	4.76	.41	3.50	1.15	2.12	5.88	4.50	2.75	.12	6.50	3/8-16	4.87	.187	1.38
145TC	6.38	5.97	11.70	3.50	2.75	2.50	.30	.375	1.29	7.09	7.19	.875	2.00	.75	7.19	4.76	.71	3.50	1.15	2.12	5.88	4.50	2.75	.12	6.50	3/8-16	5.37	.187	1.38
182TC	8.38	5.45	12.92	3.50	2.75	2.25	.38	.463	1.64	9.10	9.21	1.125	2.50	.75	8.06	5.64	.60	4.50	1.15	2.63	7.25	8.500	3.50	.38	1/2-13	5.87	.250	1.75	
184TC	8.38	6.45	13.92	3.50	2.75	2.75	.38	.463	1.64	9.10	9.21	1.125	2.50	.75	8.06	5.64	.72	4.50	1.15	2.63	7.25	8.500	3.50	.38	1/2-13	6.37	.250	1.75	
213TC	9.50	6.58	15.59	3.50	2.75	4.25	.49	.463	2.06	10.57	10.65	1.375	3.12	1.00	8.59	6.65	.72	5.25	1.59	3.12	7.25	8.500	4.25	.28	8.77	1/2-13	7.25	.312	2.38
215TC	9.50	8.08	17.09	3.50	2.75	4.25	.49	.463	2.06	10.57	10.65	1.375	3.12	1.00	8.59	6.65	1.47	5.25	1.59	3.12	7.25	8.500	4.25	.28	8.77	1/2-13	8.00	.312	2.38
254TC	11.24	9.57	19.24	3.50	2.75	5.00	.60	.562	2.12	12.43	12.36	1.625	3.75	1.25	9.35	7.41	1.73	6.25	1.59	3.75	7.25	8.500	4.75	.38	8.62	1/2-13	9.12	.375	2.88
256TC	11.24	11.32	20.98	3.50	2.75	5.00	.60	.562	2.12	12.43	12.36	1.625	3.75	1.25	9.35	7.41	2.61	6.25	1.59	3.75	7.25	8.500	4.75	.38	8.62	1/2-13	10.00	.375	2.88